


SAMMYS FOR CONCRETE – Vertical Application



PRODUCT FEATURES

- Easy two step process (Drill hole & drive Sammys concrete anchor).
- 1/4" pre-drilled pilot hole required.
- Concrete Installation Tool available for a one tool installation process.
- Assembled in the U.S.A.

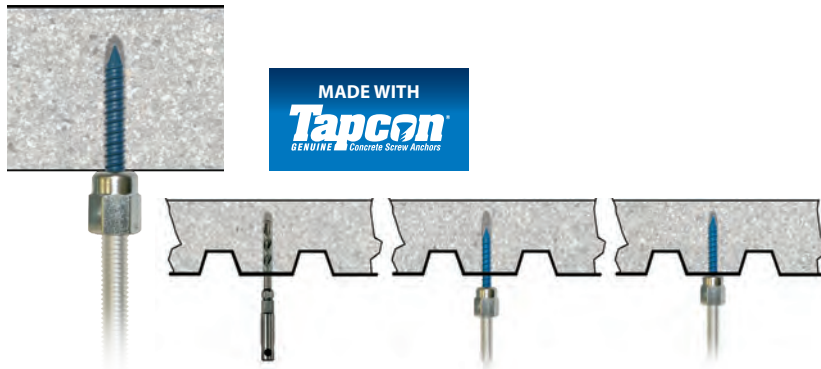

View our installation videos:
www.sammysanchors.com/install


VERTICAL MOUNT

Approvals	Rod Size	Part Number	Model	Screw Description	Ultimate Pullout (lbs)*	FM Test Load (lbs)	Box Qty	Case Qty	Nut Driver
	1/4"	8058957	CST 200	5/16 x 1-3/4"	2400		25	125	#14 Black Part # 8113910
	3/8"	8059957	CST 20	5/16 x 1-3/4"	2400	1475	25	125	#14 Black Part # 8113910
	1/2"	8060925	CST 2	5/16 x 1-3/4"	2400		25	125	#14 SW Red Part # 8114910

*Tested in 3000 PSI concrete

For complete performance data see ICC Report ESR-3699

SIDEWINDER® FOR CONCRETE – Horizontal Application

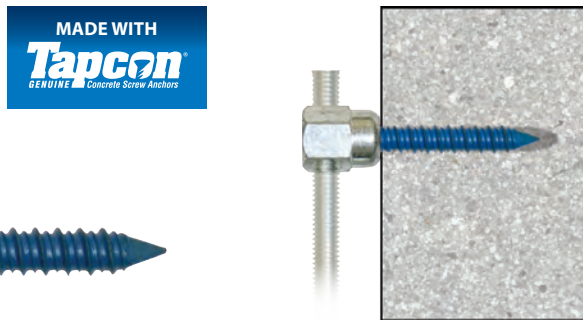

PRODUCT FEATURES

- Easy two step process (Drill hole & drive Sammys concrete anchor).
- 1/4" pre-drilled pilot hole required.
- Concrete Installation Tool available for a one tool installation process.
- Assembled in the U.S.A.



View our installation videos:
www.sammysanchors.com/install

HORIZONTAL MOUNT

Approvals	Rod Size	Part Number	Model	Screw Description	Ultimate Shear (lbs)*	FM Test Load (lbs)	Box Qty	Case Qty	Nut Driver
	3/8"	8061957	SWC 20	5/16 x 1-3/4"	2450	1475	25	125	#14 SW Red Part # 8114910

*Tested in 3000 PSI concrete

SAMMYS NUT DRIVERS



#14 Black Nut Driver
Part # 8113910

#14 SW Red Nut Driver
Part # 8114910

#14 SH Orange Nut Driver
Part # 8273910

SPECIAL NUT DRIVER SYSTEM: The nut drivers were designed with a unique spin-off feature which provides a fast and safe installation each time. When the face of the driver comes into contact with the material you are installing into, continue drilling until nut driver spins free. Installation is then complete. Warranty requires the use of the appropriate nut driver for installations.

