




SAMMY X-PRESS® – Vertical Application

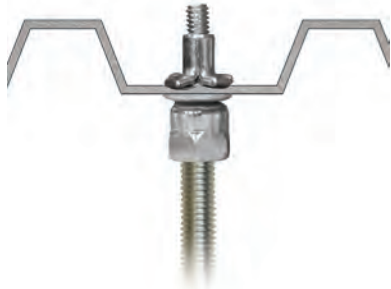

PRODUCT FEATURES

- The Sammy X-Press expands to provide direct vertical attachment in:
 - light gauge steel deck or purlin (22 ga – 1/8").
- Installs in seconds with Sammy X-Press It® Tool, saving time & installation costs.
- Use in applications where access to the back of the installed fastener is prohibited, ie. metal roof deck, tubular steel, or vapor barrier fabric.
- Less jobsite material needed.
- No retaining nut required.
- Provides design flexibility.
- Assembled in the U.S.A.




View our installation videos:
www.sammysanchors.com/install

VERTICAL MOUNT

Approvals	Rod Size	Part Number	Model	Description	Ultimate Pullout (lbs)	UL Test Load (lbs)	UL Min Thick	FM Test Load (lbs)	FM Min Thick	Max. Thick	Box Qty	Case Qty	Application
	1/4"	8181922	XP 200	Sammy X-Press 200	1146 (22 ga)	185 (Luminaire) 250 (Luminaire)	.027"			.125"	25	125	Metal Deck
	3/8"	8150922	XP 20	Sammy X-Press 20	1146 (22 ga)	850 (2½" Pipe) 185 (Luminaire) 250 (Luminaire) 283 (Conduit & Cable)	.027" .027" .060" .030"	940 (2" Pipe) 1475 (4" Pipe)	.029" .104"	.125"	25	125	Metal Deck
	3/8"	8150922	XP 20	Sammy X-Press 20	1146 (22 ga)	850 (2½" Pipe)		Pre-Pour Structural Concrete @ 3000 psi Post-Pour Range II LWC ≤ 35 PCF (lbs/ft³)			25	125	Metal Deck (Pre-Pour) Metal Deck (Post-Pour)
	3/8"	8153922	XP 35	Sammy X-Press 35	1783 (16 ga)	1500 (4" Pipe) 185 (Luminaire) 250 (Luminaire) 416 (Conduit & Cable)	.060" .030" .060" .060"	940 (2" Pipe) 1475 (4" Pipe)	.029" .104"	.125"	25	125	Purlin



SAMMY X-PRESS SIDEWINDER™ – Horizontal Application

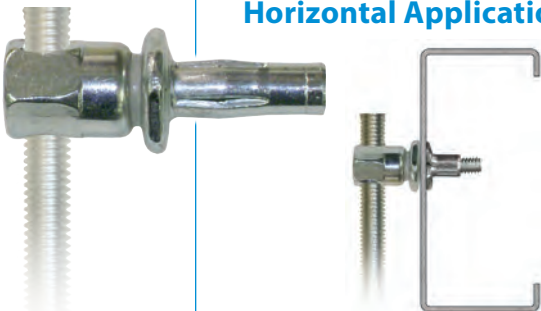

PRODUCT FEATURES

- The Sammy X-Press Sidewinder expands to provide horizontal attachment in:
 - 16 ga - 3/16" steel - purlin, tubular steel
- Installs in seconds with Sammy X-Press It® Tool, saving time & installation costs.
- Use in applications where access to the back of the installed fastener is prohibited; ie. metal roof deck, tubular steel, or vapor barrier fabric.
- Less jobsite material needed.
- No retaining nut required.
- Provides design flexibility.
- Assembled in the U.S.A.



View our installation videos:
www.sammysanchors.com/install

HORIZONTAL MOUNT

Approvals	Rod Size	Part Number	Model	Description	Ultimate Shear (lbs)	UL Test Load (lbs)	UL Min Thick	Max. Thick	Box Qty	Case Qty	Application
	3/8"	8293957	SWXP35	Sidewinder X-Press 35	1798 (16 ga)	1250 (3½" Pipe) 80 (Luminaire) 416 (Conduit & Cable)	.060"	.125"	25	125	Metal Deck/Purlin